



Frederick P. Fish
1855-1930

W.K. Richardson
1859-1951

FISH & RICHARDSON P.C.

November 15, 1999

Attorney Docket No.: 05918-153001

Box Patent Application

Assistant Commissioner for Patents
Washington, DC 20231

Presented for filing is a new original patent application of:

Applicant: HOWARD A. KINGSFORD

Title: SKIN ATTACHMENT MEMBER

Enclosed are the following papers, including those required to receive a filing date under 37 CFR 1.53(b):

	<u>Pages</u>
Specification	8
Claims	3
Abstract	1
Declaration	2
Drawing(s)	6

Enclosures:

- Assignment cover sheet and an assignment, 2 pages, and a separate \$40.00 fee.
- New disclosure information, including:
 - Information disclosure statement, 2 pages.
 - PTO-1449, 1 pages.
 - References, 5 items.
- Postcard.

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EE346223988US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

11-15-99
Date of Deposit

[Signature]
Signature

R. Tanschaum
Typed or Printed Name of Person Signing Certificate

A

225 Franklin Street
Boston, Massachusetts
02110-2804

Telephone
617 542-5070

Facsimile
617 542-8906

Web Site
www.fr.com



BOSTON
DELAWARE
NEW YORK
SILICON VALLEY
SOUTHERN CALIFORNIA
TWIN CITIES
WASHINGTON, DC

FISH & RICHARDSON P.C.

Assistant Commissioner for Patents

November 15, 1999

Page 2

Basic filing fee	\$760
Total claims in excess of 20 times \$18	\$0
Independent claims in excess of 3 times \$78	\$0
Fee for multiple dependent claims	\$0
Total filing fee:	\$760

A check for the filing fee is enclosed. Please apply any other required fees or any credits to deposit account 06-1050, referencing the attorney docket number shown above.


If this application is found to be incomplete, or if a telephone conference would otherwise be helpful, please call the undersigned at (617) 542-5070.

Kindly acknowledge receipt of this application by returning the enclosed postcard.

Please send all correspondence to:

JOHN N. WILLIAMS
Fish & Richardson P.C.
225 Franklin Street
Boston, MA 02110-2804

Respectfully submitted,



Phyllis K. Kristal
Reg. No. 38,524
Enclosures
PKK/srj

06-1050-10460

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: SKIN ATTACHMENT MEMBER

APPLICANT: HOWARD A. KINGSFORD

66511 " 43E0460

CERTIFICATE OF MAILING BY EXPRESS MAIL

Express Mail Label No. EE346223988US

I hereby certify under 37 CFR §1.10 that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee with sufficient postage on the date indicated below and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

November 15, 1999

Date of Deposit

Signature

R. TAWENBAUM

Typed or Printed Name of Person Signing Certificate

Background of the Invention

5

10

Summary of the Invention

15

20

25

30

Embodiments of this aspect of the invention may include one or more of the following features.

35

about 0.012" and a pointed tip. The backing has a thickness in a range of about 0.003" to 0.008".

In an illustrated embodiment, the retention barb is located about 0.008" to 0.0095" along a length of the skin penetrating element from the backing, has a length of about 0.0001", and tapers from a thickness of about 0.0001" to a point at an angle of about 72°. Each skin penetrating element includes, e.g., two barbs.

The skin attachment member has a density of about 400 skin penetrating elements in a 0.01 in² area, i.e., 40,000/in². The skin penetrating elements are spaced apart from each other a distance of about 0.003".

The skin attachment member is formed from nylon, polyethylene teraphthalate, or polyester. The skin attachment member is formed by molding.

In an illustrated embodiment, at least many of the skin penetrating elements define at least one groove in an outer surface of the skin penetrating elements. The skin penetrating elements are oriented perpendicular to the backing.

Other features and advantages of the invention will be apparent from the following description, and from the claims.

Brief Description of the Drawings

Fig. 1 is a highly magnified side view of a section of a skin attachment member according to the invention shown secured in the epidermis;

Fig. 2 is a diagrammatic perspective view of the section of the skin attachment member of Fig. 1;

Fig. 3A is a side view of a skin-penetrating element of the skin attachment member of Fig. 1;

Fig. 3B is a another side view of the element of Fig. 3A, rotated 90 degrees relative to Fig. 3A;

Fig. 3C is an end view of the element of Fig. 3A taken along lines 3C-3C in Fig. 3A;

Fig. 3D is a cross-sectional view of the element of Fig. 3A taken along lines 3D-3D in Fig. 3B;

5 Fig. 4 is a perspective view of section A of Fig. 3B showing a barb of the element of Fig. 3A;

Fig. 5 shows an alternative embodiment of a barb;

Fig. 6A is a diagrammatic representation of a molding machine for forming the skin attachment member of
10 Fig. 1;

Fig. 6B shows a mold roll, pressure roll, and trim roller of the molding machine of Fig. 6A;

Fig. 6C is an enlarged view of the mold roll and pressure roll of the molding machine;

15 Fig. 7A is a side view of the mold roll of Fig. 6A;

Fig. 7B is a cross-sectional view of the mold roll, taken along lines 7B-7B in Fig. 7A;

Fig. 7C is an end view of the mold roll, taken along lines 7C-7C in Fig. 7B;

20 Fig. 7D is a magnified side view of portion 7D of the mold roll of Fig. 7A;

Fig. 7E shows laser machining of the mold roll; and

Fig. 8 shows an alternative edge formation on a mold roll.

25 Description of the Preferred Embodiments

Referring to Figs. 1 and 2, a skin attachment member 10, formed of plastic resin, includes a backing 12 and multiple, parallel rows of integrally molded, pointed projections or elements 14 extending from backing 12 for
30 penetrating into the epidermis 16. The skin-penetrating elements 14 each include a cone-shaped body 18 with one or more discrete barbs 20 extending from the body for securing skin attachment member 10 to epidermis 16.

The length of elements 14 is selected such that they do not penetrate so far into the skin as to contact nerves located below the outer layers of the epidermis, as to cause significant pain and discomfort, but are long enough to cooperate with each other to provide sufficient adhesion to the skin. Elements 14 can be sized to extend into the portion of skin lying below the stratum corneum layer of the skin because of the small size of elements 14 and the spacing between nerves at this depth. For example, referring also to Fig. 3A, plastic elements 14 have a length, L , of about 0.012". Since the thickness of the epidermis varies, for example, with age, the location on skin, and the gender of the patient, the length of elements 14 can be selected for the particular use.

Cone 18 tapers from a larger diameter proximal base 22 to a distal pointed tip 24. The conical shape and sharp point of elements 14 ease their penetration into epidermis 16. The diameter of base 22 is selected to be large enough to help prevent breaking off of the projecting elements 14 from backing 12, while limiting the size of the opening made in the outer surface 16a of epidermis 16. For example, cone 18 has a base diameter, D , of about 0.003". Backing 12 has a thickness, T , in a range of about 0.003" to 0.008" to provide member 10 with sufficient handling characteristics.

The skin-penetrating projecting plastic elements 14 can be other than conical in shape. For example, elements 14 can be in the shape of a pyramid, a tetrahedron, or may be elliptical or square in cross-section, tapering to points at their distal ends. Rather than taper distally, elements 14 can progressively step down in diameter. Regardless of the particular shape selected, the elements 14 include sharp pointed tips 24 to ease tissue penetration.

Referring to Figs. 4A and 4B, projecting elements 14 are shown with two discrete barbs 20a, 20b for retaining elements 14 in the skin, though fewer or more barbs can be disposed on cone 28 to provide the desired retention

5 characteristics. The location of barbs 20 can be selected to take advantage of the greater elasticity of the skin portions lying below the stratum corneum to provide greater holding force. For example, barb 20a has a top surface 23a located a distance, d_1 , of about 0.008" from base 22, and
10 barb 20b has a top surface 23b located a distance, d_2 , of about 0.0095" from base 22.

Referring to Fig. 4, which is an enlarged view of section A of Fig. 3B, barbs 20a, 20b are roughly half-pyramids, each having a flat upper surface 23a which is
15 perpendicular to a longitudinal axis, A, of the projecting element 14, and sloped sides 28a, 28b. Barbs 20a, 20b have a length, l , of about 0.0001", and a thickness, t (Fig. 3d), of about 0.0001", which tapers to a point 26 at an angle, α , of about 72°.

20 In use, due to the elasticity of the skin, member 10 is secured to skin surface 16a by surrounding of the barbs by the epidermis. To improve retention of member 10 to the skin, the barbs can be angled as shown in Fig. 5. Here, a barb 20c has a sloped upper surface 23c.

25 The density of projecting elements 14 on backing 12 depends on use. For example, in high strain applications, a higher density provides better skin attachment, whereas, in applications in which member 10 is not subjected to high strain, a lower density is better for limiting the
30 possibility of inflammation. If the density is too high, it can require too much force for elements 14 to penetrate into the skin. A density of 400 projecting elements in a 0.1 in² area provides good skin attachment while not requiring

excessive insertion force. In this case the projecting elements 14 are preferably spaced apart a distance, d (Fig. 1), of about 0.003".

Member 10 and its projecting elements 14 are preferably formed from a thermoplastic, biocompatible polymer, which is stiff enough to penetrate skin but not brittle, and capable of filling a mold and retaining its molded form. Example of suitable polymers include nylon, polyethylene terephthalate, and polyester.

Referring to Fig. 3C and 3D, if desired for use in, for example, drug delivery, the projecting elements 14 include longitudinal grooves 30 in an outer surface 32 of cone 18, here four grooves 30 being shown, which provide passages for drug delivery. The penetration of elements 14 into the epidermis facilitates the delivery of drugs through the epidermis by reducing the thickness of the skin barrier to the vascular layer below the epidermis.

Other uses of member 10 include securing an intravenous or other catheter to the skin, such as securing in place a port for peritoneal dialysis, thus replacing a suture or a butterfly or acting secondary to a suture, acting as bandaid type wound closure to hold two sections of skin together, as wound covering, as a delivery system for self-delivery of drugs, in veterinary applications, as a reaction indicator, for time release vaccination, in agricultural applications such as bundle ties limiting damage to produce, and in geotextile applications. Incorporated in the polymer from which member 10 is formed can be bacteria killing agents or medication.

Skin attachment member 10 can be molded as a continuous strip 10' according to the principles described in Fischer, U.S. Patent 4,794,028, hereby incorporated by reference.

For example, referring to Figs. 6A-6C, a molding machine 40 includes an extruder 42 which delivers an extrusion of molten plastic material between a pair of rollers 44, 46 mounted for rotation in opposite directions. Roller 44 is a cooled mold roll having a set of stacked parallel plates 48 (Fig. 7B) in which edge formations 50 define rows of projecting element-mold cavities 52. Roller 46 is a pressure roll which coacts with mold roll 44 for formation of continuous strip 10'.

Molten resin is continuously extruded and applied with pressure against mold roll 44 using pressure roll 46. Molten resin is forced into mold cavities 52 and between rolls 44, 46, to form the projecting elements 14 integral with backing 12. After cooling while on the roll, the continuous strip 10' is stripped from mold roll 44, the projecting elements 14 undergoing temporary elastic deformation to achieve release from the mold cavities 52.

A trim roller assembly 60 is mounted above mold roll 44 such that continuous strip 10' is removed or stripped from mold roll 44 immediately upstream of trim roller assembly 60. Trim roller assembly 60 can include two rollers, as shown Fig. 6A, or one roller, as shown in Fig. 6B. A tensioning roller assembly 62 creates tension in member 10 for effecting the removal of strip 10' from mold roll 64. Downstream of tensioning roller assembly 62 is a winder 64 for winding continuous strip 10' on spools 66 for subsequent shipment, storage and use.

Referring to Figs. 7A and 7B, mold roll 44 includes a series of stacked plates 48 having edge formations 50 on either side of each plate. When stacked, plates 48 together define projecting element-forming cavities 52 within which projecting elements 14 are formed. Plates 48 also define water passages 68 for cooling of member 10'.

Referring to Fig. 7D, which is an enlarged view of section 7D of Fig. 7A, plates 48 of mold role 46 can be formed by etching a cone shape 70 for a length of about 0.004" from roll edge 72. The remaining tip portion 74 of the cone is formed by laser machining (Fig. 7E) in which a laser 80, under computer position control, is used to remove material from the plate to form the tip portion. Barb impressions 20a' and 20b' can also be formed using laser machining. The laser can also be controlled to form grooves 30 in cone 18. The mold rolls are preferably formed of beryllium copper, the temperature of which is controlled during molding such that the resin does not cool too fast during application.

Fig. 8 shows an alternative embodiment of a mold cavity in which a first plate 48 defines an edge formation 50 as described above, and a second plate 48' defines an edge formation 50' having a tip 94 terminating prior to a tip 92 of edge formation 50. Thus, distal tip 24 of element 12 is defined by tip 92.

While skin attachment member 10 has been described as including multiple, parallel rows of projecting elements 14, the mold rolls can be arranged such that the rows of elements 14 are offset or otherwise distributed on backing 12. The projecting elements 14 can also be formed such that their longitudinal axes are not perpendicular to backing 12 or are distributed at various angles to backing 12. While enough of the projecting elements 14 should include barbs 20 to provide the desired degree of securement to the skin, not all of projecting elements 14 need include barbs 20.

Other embodiments are within the scope of the following claims.

What is claimed is:

3 element is located about 0.008" to 0.0095" along a length of
4 the skin penetrating element from the backing.

1 8. The skin attachment member of claim 1 wherein
2 the at lest one retention barb of each skin penetrating
3 element has a length of about 0.0001".

1 9. The skin attachment member of claim 1 wherein
2 the at lest one retention barb of each skin penetrating
3 element tapers from a thickness of about 0.0001" to a point
4 at an angle of about 72°.

1 10. The skin attachment member of claim 1 wherein
2 of each skin penetrating element includes two barbs.

1 11. The skin attachment member of claim 1 having a
2 density of about 400 skin penetrating elements in a 0.1 in²
3 area.

1 12. The skin attachment member of claim 1 wherein
2 the skin penetrating elements are spaced apart from each
3 other a distance of about 0.003".

1 13. The skin attachment member of claim 1 formed
2 from nylon.

1 14. The skin attachment member of claim 1 formed
2 from polyethylene teraphthalate.

1 15. The skin attachment member of claim 1 formed
2 from polyester.

1 16. The skin attachment member of claim 1 formed by
2 molding.

1 17. The skin attachment member of claim 1 wherein
2 at least many of the skin penetrating elements define at
3 least one groove in an outer surface of the skin penetrating
4 elements.

1 18. The skin attachment member of claim 1 wherein
2 the skin penetrating elements are oriented perpendicular to
3 the backing.

SKIN ATTACHMENT MEMBER

Abstract of the Disclosure

A skin attachment member of plastic resin, includes a sheet-form backing, and an array of skin penetrating elements extending integrally from the backing. The skin penetrating elements are configured to penetrate into the epidermal skin layer and are sized to limit painful contact with nerves below the epidermal skin layer. At least many of the skin penetrating elements each include at least one retention barb extending from an outer surface of the skin penetrating element. The barbs are configured to cooperate to resist removal of the skin attachment member from skin. The skin penetrating elements have a cone-shaped body with a pointed tip. The skin penetrating elements can have a groove in their outer surface. The skin attachment member is formed by molding.

397598.B11

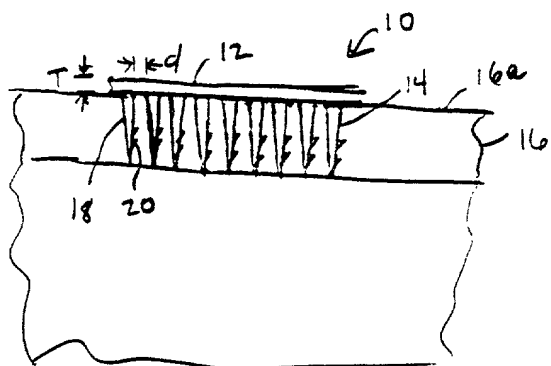


Fig. 1

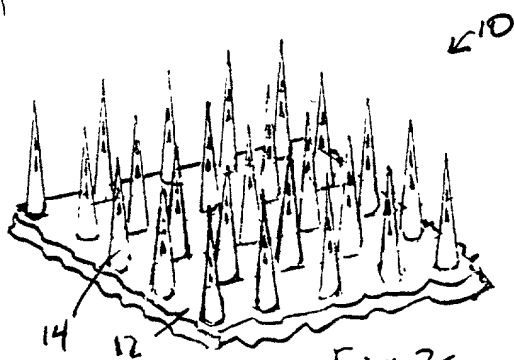


Fig. 2



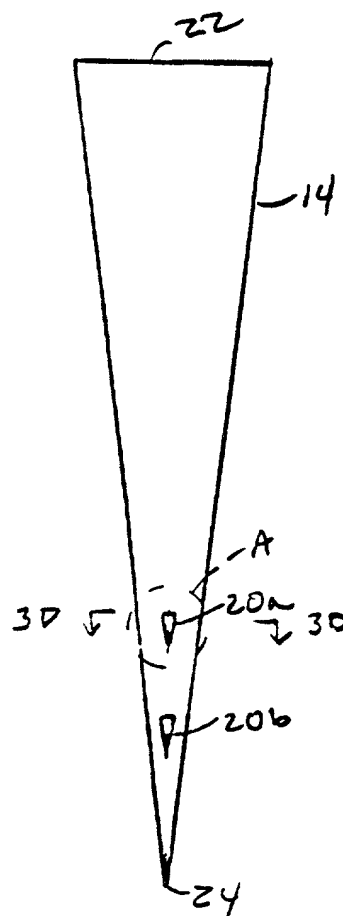
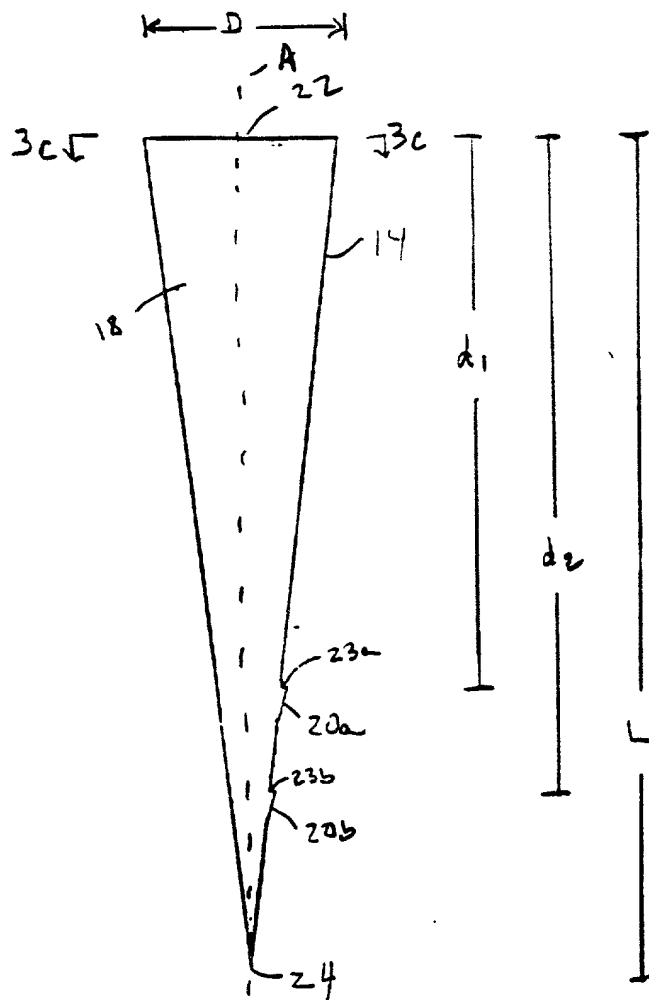

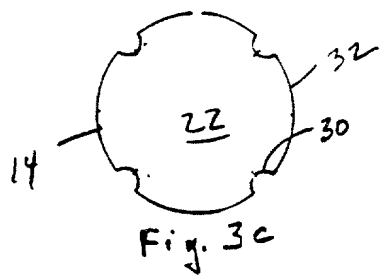




Fig. 4

Fig. 3A

Fig. 3B

Fig. 3c

Fig. 3D

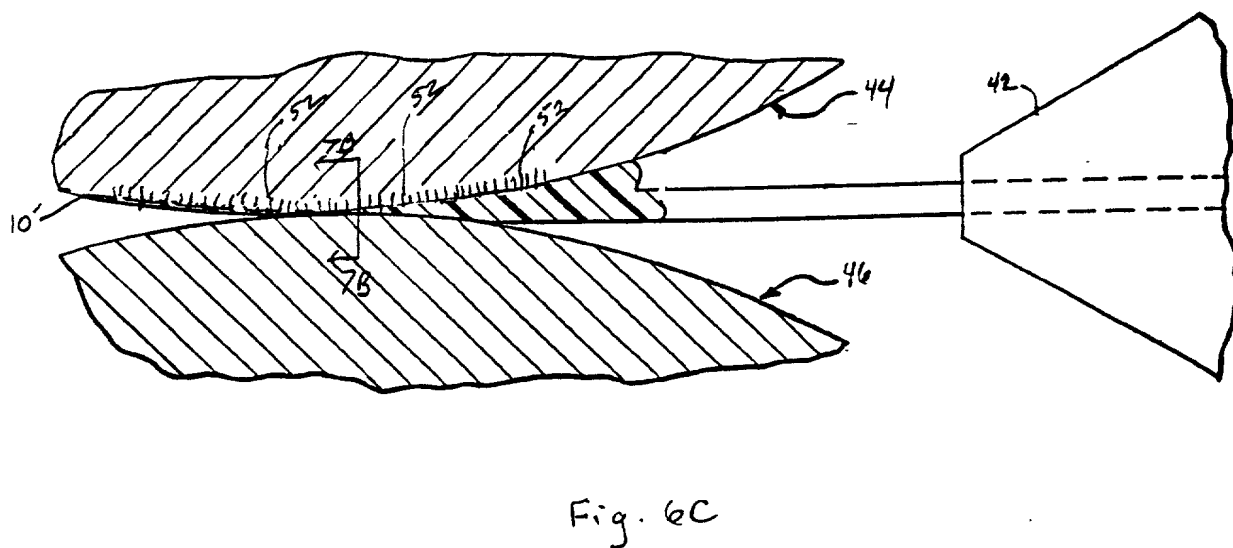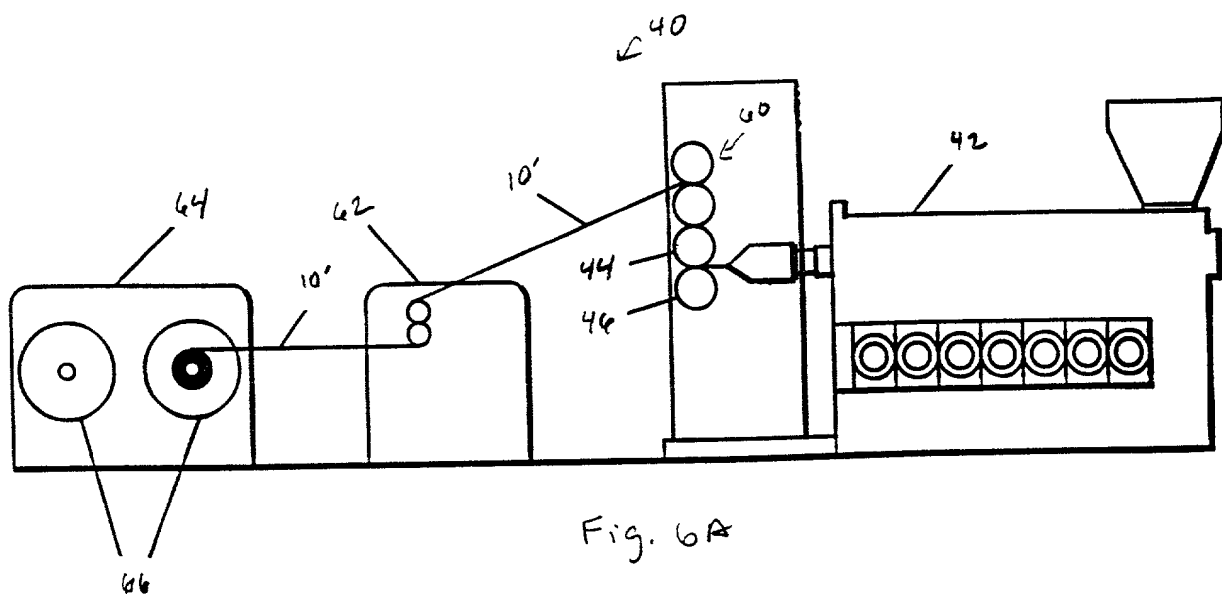

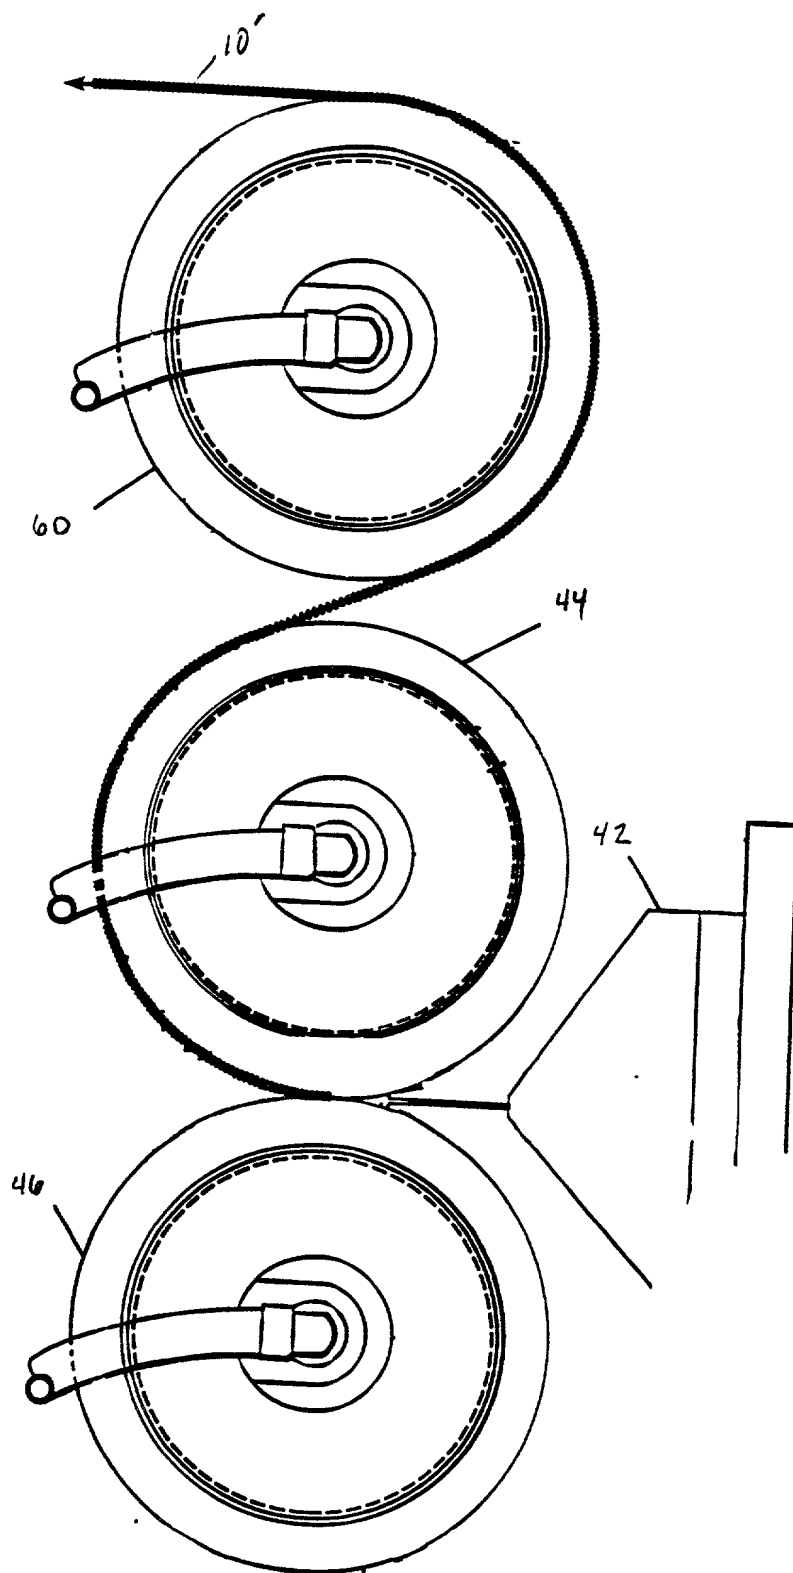


FIG. 6B

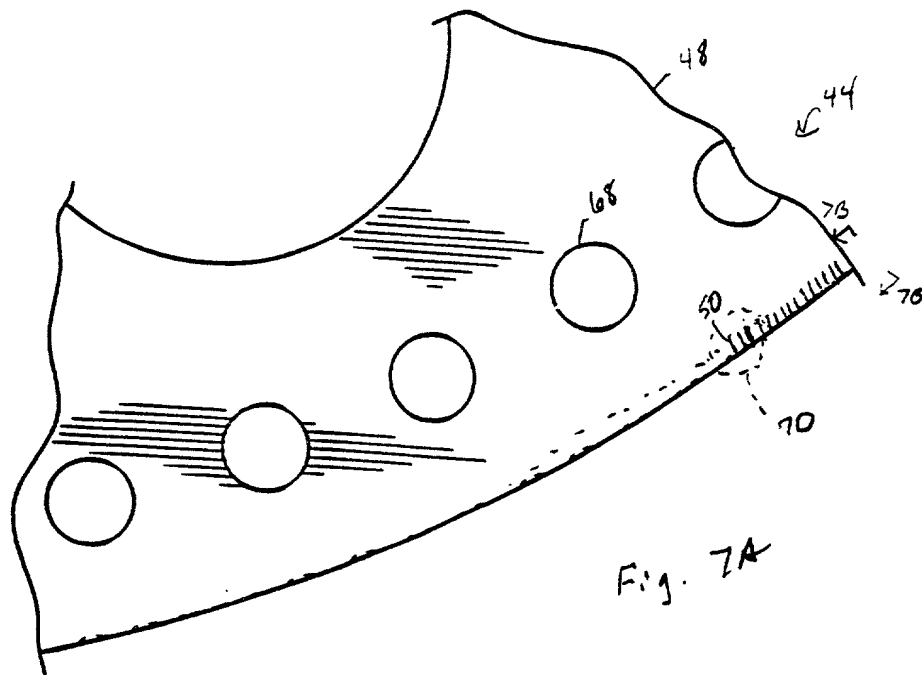


Fig. 7A

05440344-11504

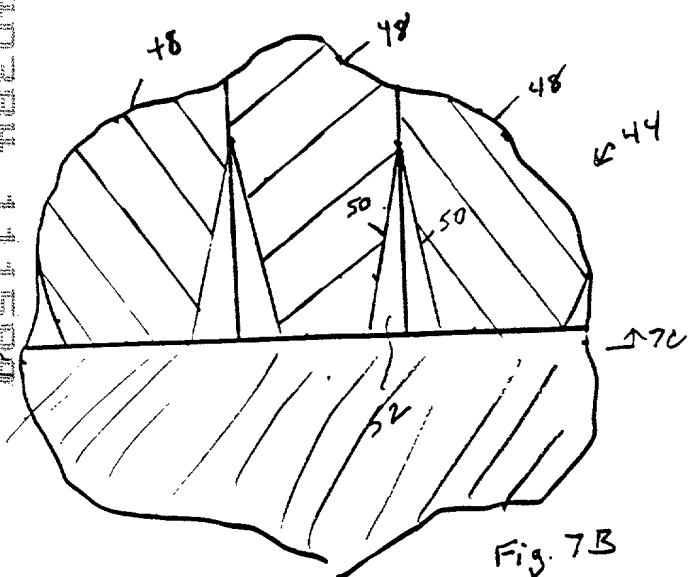


Fig. 7B

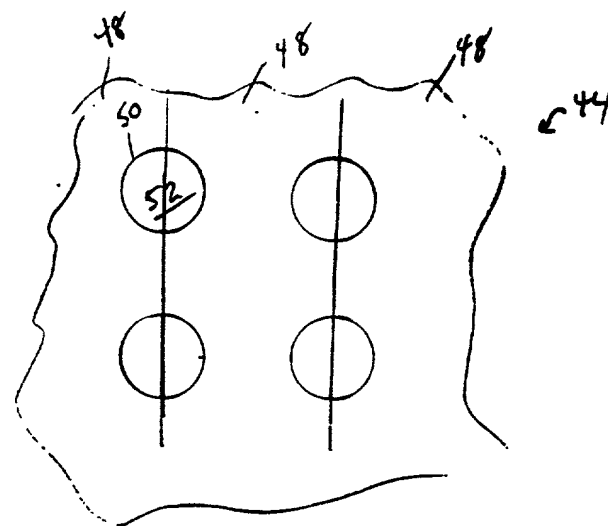


Fig. 7C

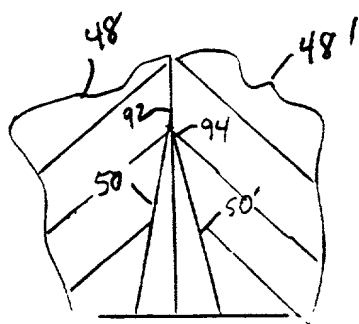


Fig. 8

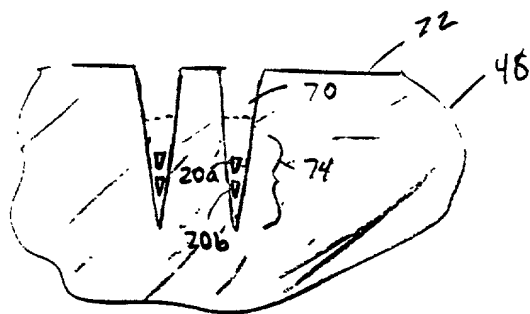


Fig. 7D

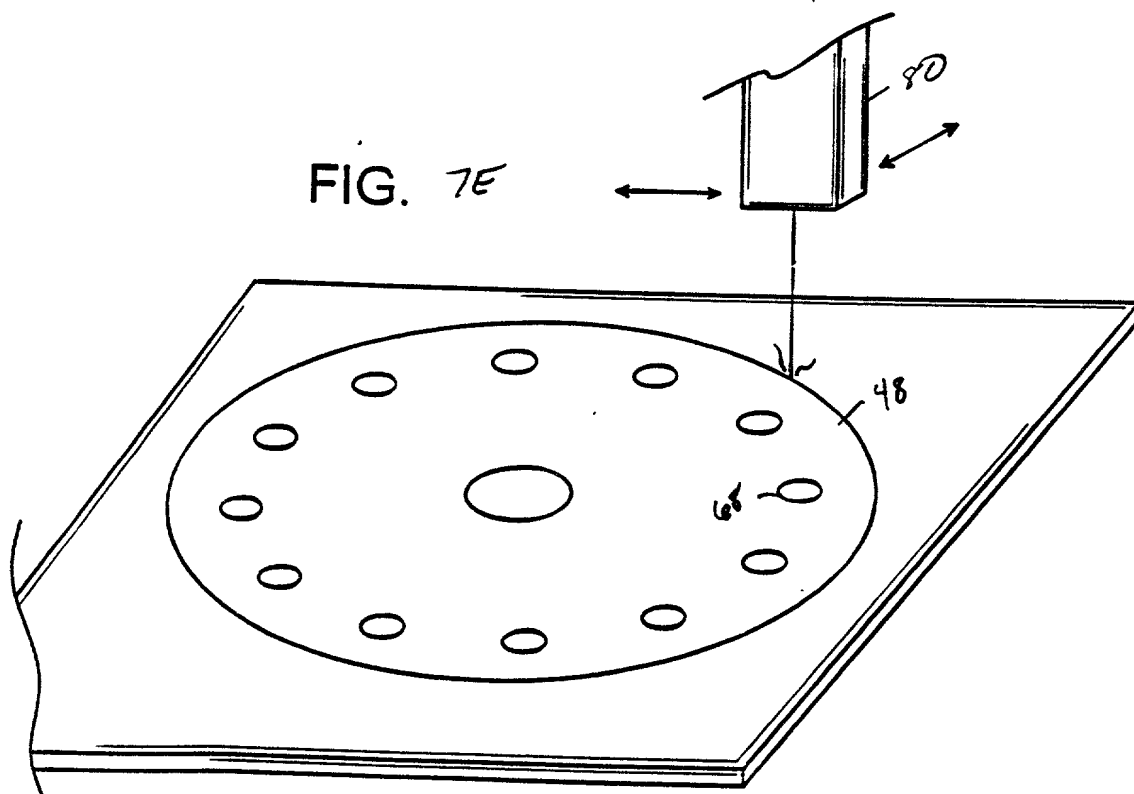


FIG. 7E

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled SKIN ATTACHMENT MEMBER, the specification of which:

- ☒ is attached hereto.
☐ was filed on _ as Application Serial No. _ and was amended on _____.
☐ was described and claimed in PCT International Application No. _____ filed on _____ and as amended under PCT Article 19 on _____.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby appoint the following attorneys and/or agents to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

John N. Williams, Reg. No. 18,948
James W. Babineau, Reg. No. 42,276
Phyllis K. Kristal, Reg. No. 38,524

Celia H. Leber, Reg. No. 33,524
Timothy A. French, Reg. No. 30,175
John F. Hayden, Reg. No. 37,640

Address all telephone calls to PHYLLIS K. KRISTAL at telephone number 3409.

Address all correspondence to JOHN N. WILLIAMS at:

FISH & RICHARDSON P.C.
225 Franklin Street
Boston, MA 02110-2804

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patents issued thereon.

05918-153001-430460


Combined Declaration and Power of Attorney

Page 2 of 2 Pages

Full Name of Inventor: HOWARD A. KINGSFORD

Inventor's Signature:

Residence Address:


Four Winterberry Drive
Amherst, New Hampshire 03031
United States of America

Date:

11/10/99

Citizenship:

US

Post Office Address:

Four Winterberry Drive
Amherst, New Hampshire 03031
United States of America

20003225.doc

05918-153001-111099